



Barrel Roller Bearings

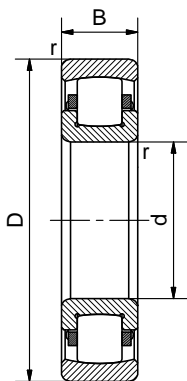

Metric Series

202, 203

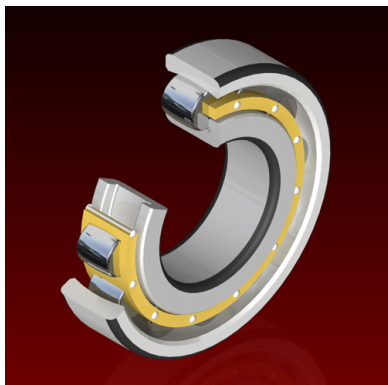

Dimensions				Load Rating		AEC Bearing	K	M
mm				kN				
d	D	B	r	Dynamic (C)	Static (C ₀)			
20	47	14	1.0	20.4	19.3	20204	•	•
	52	15	1.1	27.0	24.5	20304	•	•
25	52	15	1.0	24.0	25.0	20205	•	•
	62	17	1.1	36.0	34.5	20305	•	•
30	62	16	1.0	27.5	28.5	20206	•	•
	72	19	1.1	49.0	49.0	20306	•	•
35	72	17	1.1	40.5	43.0	20207	•	•
	80	21	1.5	58.5	61.0	20307	•	•
40	80	18	1.1	49.0	53.0	20208	•	•
	90	23	1.5	76.5	81.5	20308	•	•
45	85	19	1.1	52.0	57.0	20209	•	•
	100	25	1.5	86.5	95.0	20309	•	•
50	90	20	1.1	58.5	68.0	20210	•	•
	110	27	2.0	108.0	118.0	20310	•	•
55	100	21	1.5	73.5	85.0	20211	•	•
	120	29	2.0	120.0	137.0	20311	•	•
60	110	22	1.5	85.0	100.0	20212	•	•
	130	31	2.1	146.0	170.0	20312	•	•
65	120	23	1.5	95.0	116.0	20213	•	•
	140	33	2.1	170.0	196.0	20313	•	•
70	125	24	1.5	106.0	134.0	20214	•	•
	150	35	2.1	183.0	216.0	20314	•	•
75	130	25	1.5	112.0	143.0	20215	•	•
	160	37	2.1	216.0	255.0	20315	•	•
80	140	26	2.0	125.0	163.0	20216	•	•
	170	39	2.1	245.0	285.0	20316	•	•
85	150	28	2.0	156.0	200.0	20217	•	•
	180	41	3.0	270.0	320.0	20317	•	•

Dimensions				Load Rating		AEC Bearing	K	M
mm				kN				
d	D	B	r	Dynamic (C)	Static (C ₀)			
90	160	30	2.0	173.0	220.0	20218	•	•
	190	43	3.0	300.0	360.0	20318	•	•
95	170	32	2.1	208.0	265.0	20219	•	•
	200	45	3.0	335.0	400.0	20319	•	•
100	180	34	2.1	224.0	290.0	20220	•	•
	215	47	3.0	365.0	440.0	20320	•	•
105	190	36	2.1	245.0	315.0	20221	•	•
	225	49	3.0	375.0	480.0	20321	•	•
110	200	38	2.1	285.0	375.0	20222	•	•
	240	50	3.0	430.0	520.0	20322	•	•
120	215	40	2.1	305.0	415.0	20224	•	•
	260	55	3.0	490.0	630.0	20324	•	•
130	230	40	3.0	335.0	450.0	20226	•	•
	280	58	4.0	550.0	720.0	20326	•	•
140	250	42	3.0	390.0	530.0	20228	•	•
	300	62	4.0	640.0	850.0	20328	•	•
150	270	45	3.0	430.0	610.0	20230	•	•
	320	65	4.0	720.0	950.0	20330	•	•
160	290	48	3.0	500.0	720.0	20232	•	•
	340	68	4.0	780.0	1050.0	20332	•	•
170	310	52	4.0	570.0	830.0	20234	•	•
	360	72	4.0	870.0	1165.0	20334	•	•
180	320	52	4.0	285.0	850.0	20236	•	•
	380	75	4.0	935.0	1260.0	20336	•	•
190	340	55	4.0	640.0	950.0	20238	•	•
	400	78	5.0	1025.0	1338.0	20338	•	•
200	360	58	4.0	735.0	1080.0	20240	•	•
	420	80	5.0	1060.0	1420.0	20340	•	•
220	400	62	4.0	880.0	1320.0	20244	•	•
	460	88	5.0	1290.0	1755.0	20344	•	•
240	440	72	4.0	1060.0	1600.0	20248	•	•
	500	95	5.0	1550.0	2100.0	20348	•	•
260	480	80	5.0	1270.0	1930.0	20252	•	•
280	500	80	5.0	1290.0	2000.0	20256	•	•