


# Taper Roller Bearings

Single Row  
Inch Series

**K, KHM, KL, KLM**

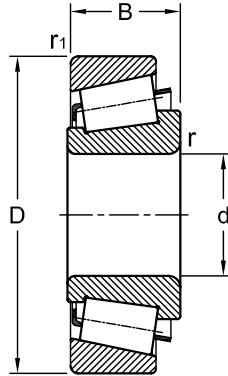

Dimensions				Load Rating			AEC Bearing	
inch				kN				
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )		
<b>0.5901</b>	1.3775	0.4330	0.8	1.3	13.4	13.2	K-A 4059/K-A 4138	
<b>0.6250</b>	1.6250	0.5625	1.3	2.0	22.0	21.2	K-03062/K-03162	
	1.6875	0.5625	1.5	1.5	17.6	17.6	K-11590/K-11520	
<b>0.6875</b>	1.5700	0.5450	1.3	1.3	21.2	20.8	K-LM 11749/K-LM 11710	
<b>0.7500</b>	1.7810	0.6100	1.3	1.3	27.5	27.5	K-LM 11949/K-LM 11910	
	1.9380	0.7100	1.3	1.3	39.1	40.0	K-09067/K-09195	
	1.9380	0.7813	1.5	1.3	39.1	40.0	K-09074/K-09195	
	1.9380	0.7813	1.3	1.3	39.1	40.0	K-09078/K-09195	
	1.9380	0.8350	1.3	1.5	39.1	40.0	K-09067/K-09196	
	1.9380	0.9063	1.5	1.5	39.1	40.0	K-09074/K-09196	
	1.9380	0.9063	1.3	1.5	39.1	40.0	K-09078/K-09196	
	2.1250	0.8750	1.5	2.3	39.6	39.0	K-21075/K-21212	
	<b>0.8120</b>	1.9380	0.7813	1.5	1.3	39.1	40.0	K-09081/K-09195
		1.9380	0.9063	1.5	1.5	39.1	40.0	K-09081/K-09196
<b>0.8437</b>	1.9687	0.6900	1.3	1.3	36.9	38.0	K-M 12649/K-M 12610	
<b>0.8656</b>	1.7810	0.6100	1.3	1.3	27.5	31.0	K-LM 12749/K-LM 12710	
	1.8100	0.6100	1.3	1.3	27.5	31.0	K-LM 12749/K-LM 12711	
<b>0.8750</b>	2.0000	0.5910	1.5	1.5	28.1	30.5	K-07087/K-07210 X	
	2.0625	0.7625	1.5	1.5	41.8	44.0	K-1380/K-1328	
<b>1.0000</b>	1.9800	0.5600	1.3	1.3	26.0	30.0	K-L 44643/K-L 44610	
	2.0000	0.5910	1.5	1.5	28.1	30.5	K-07100 S/K-07210 X	
	2.0000	0.5910	3.3	1.5	28.1	30.5	K-07100 SA/K-07210 X	
	2.2500	0.7650	1.5	1.5	39.6	45.0	K-M 84548/K-M 84510	
	2.4409	0.7500	0.8	1.3	48.4	57.0	K-15101/K-15245	
	2.5000	0.8125	3.5	1.3	47.4	86.0	15100/15250	
<b>1.0236</b>	2.5000	0.8125	0.8	1.5	48.4	57.0	K-15101/K-15250 X	
	2.3543	0.6875	2.0	2.0	43.5	76.3	1838057/1838058	
<b>1.0625</b>	1.9800	0.5600	3.5	1.3	26.0	30.0	K-L 44649/K-L 44610	
<b>1.1250</b>	2.2500	0.7813	3.5	1.5	47.3	55.0	K-1988/K-1922	
	2.4409	0.7500	3.5	1.3	48.4	57.0	K-15112/K-15245	
	2.5000	0.8125	3.5	1.5	48.4	57.0	K-15112/K-15250	
	2.5312	0.8438	1.5	1.5	49.5	61.0	K-M 86647/K-M 86610	

Dimensions				Load Rating			AEC Bearing
inch				kN			
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	2.6875	0.8750	0.8	1.5	58.3	69.5	K-02474/K-02420
<b>1.1417</b>	1.9800	0.5600	3.5	1.3	26.0	32.5	331274
<b>1.1811</b>	2.7170	0.7813	0.8	1.3	53.9	67.0	K-14118/K-14276
	2.8380	0.8813	0.8	2.3	53.9	67.0	K-14118/K-14283
<b>1.1875</b>	2.5312	0.8438	1.5	1.5	49.5	61.0	K-M 86649/K-M 86610
	2.6875	0.8750	2.3	1.5	55.0	69.5	K-M 88043/K-M 88010
	2.6875	0.8750	2.3	2.3	55.0	69.0	K-M 88043/K-M 88011
<b>1.1895</b>	2.4409	0.7500	3.5	1.3	48.4	57.0	K-15118/K-15245
	2.5000	0.8125	3.5	1.5	48.4	57.0	K-15118/K-15250 X
<b>1.2500</b>	2.3280	0.6250	3.6	1.3	34.7	41.5	K-LM 67048/K-LM 67010
	2.4409	0.7150	4.0	1.3	48.4	57.0	K-15123/K-15245
	2.5000	0.7775	4.0	1.5	48.4	57.0	K-15123/K-15250 X
	2.6150	1.0000	0.8	3.3	69.3	81.5	K-2580/K-2520
	2.6875	0.8750	1.5	1.5	55.0	69.5	K-M 88046/K-M 88010
	2.6875	0.8750	1.5	2.3	55.0	69.5	K-M 88046/K-M 88011
	2.8593	1.1875	0.8	3.3	79.3	144.1	3188 / 3120
	2.8750	1.1563	1.3	3.3	70.4	95.0	K-HM 88452/K-HM 88510
	3.1250	1.0000	1.5	1.5	67.1	71.0	K-43125/K-43312
<b>1.3125</b>	2.6875	0.8750	0.8	1.5	55.0	69.5	K-M 88048/K-M 88010
	2.6875	0.8750	0.8	2.3	55.0	69.5	K-M 88048/K-M 88011
	2.7170	0.7813	3.5	3.3	53.9	67.0	K-14130/K-14274
	2.7170	0.7813	3.5	1.3	53.9	67.0	K-14130/K-14276
	2.7500	0.9375	3.5	1.3	70.4	133.2	2585/2523
	2.8380	0.8813	3.5	2.3	53.9	67.0	K-14130/K-14283
	3.0000	1.1563	0.8	3.3	78.1	106.0	K-HM 89443/K-HM 89410
	3.1250	1.0000	3.5	1.5	67.1	71.0	K-43131/K-43312
<b>1.3750</b>	2.5625	0.7100	3.6	1.3	47.3	57.0	K-LM 484548/K-LM 48510
	2.7170	0.7813	1.5	1.3	53.9	67.0	K-14137 A/K-14276
	2.7170	0.7813	3.5	1.3	53.9	67.0	K-14138 A/K-14276
	2.7170	0.7813	1.5	3.3	53.9	67.0	K-14137 A/K-14274
	2.7170	0.7813	3.5	3.3	53.9	67.0	K-14138 A/K-14274
	2.7170	1.0623	0.8	1.3	53.9	67.0	K-14136 A/K-14276
	2.7170	1.0623	0.8	3.3	53.9	67.0	K-14136 A/K-14274
	2.8380	0.8813	1.5	2.3	53.9	67.0	K-14137 A/K-14283
	2.8380	0.8813	3.5	2.3	53.9	67.0	K-14138 A/K-14283
	2.8380	1.1623	0.8	2.3	53.9	67.0	K-14136 A/K-14283
	2.8438	1.0000	2.3	2.3	67.1	90.0	K-HM 88649/K-HM 88610
	3.0000	0.8125	1.5	1.3	56.1	64.0	K-28137/K-28300
	3.0000	1.1563	3.5	3.3	78.1	106.0	K-HM 89446/K-HM 89410
	3.0000	1.1563	3.5	3.3	85.8	106.0	K-31593/K-31520
	3.0000	1.1563	1.5	3.3	85.8	106.0	K-31594/K-31520
	3.1250	1.1563	3.5	3.3	91.3	110.0	K-3478/K-3420
	3.1510	0.8438	1.5	1.5	56.1	64.0	K-28137/K-28317
	3.4375	1.1875	3.5	3.3	102.0	132.0	K-3581/K-3525
	2.8750	0.9375	1.5	0.8	72.1	88.0	K-25877/K-25821
	2.8750	0.9375	1.5	2.3	72.1	88.0	K-25877/K-25820
	2.8750	1.0625	3.5	1.5	73.7	88.0	K-23690/K-23620
<b>1.3775</b>	2.3280	0.6250	3.5	1.3	33.0	44.0	K-L 68149/K-L 68110

Dimensions				Load Rating			AEC Bearing
inch				kN			
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
1.4365	2.3612	0.6250	3.5	1.3	33.0	44.0	K-L 68149/K-L 68111
	2.8750	0.9375	1.5	0.8	72.1	88.0	K-25880/K-25821
	2.8750	0.9375	1.5	2.3	72.1	88.0	K-25880/K-25820
	2.8750	0.9375	3.5	0.8	74.8	93.0	K-2794/K-2735 X
1.4375	3.0000	0.9375	3.5	3.3	74.8	93.0	K-2794/K-2720
	3.0000	1.1563	0.8	3.3	78.1	106.0	K-HM 89448/K-HM 89410
	3.0000	1.1563	3.5	3.3	78.1	106.0	K-HM 89449/K-HM 89410
1.5000	3.0000	1.1563	3.5	3.3	85.8	106.0	K-31597/K-31520
	2.5625	0.7100	2.3	1.3	42.9	57.0	K-LM 29749/K-LM 29710
	2.5625	0.7800	2.3	1.3	42.9	57.0	K-LM 29749/K-LM 29711
	2.8346	0.6700	1.5	2.0	42.9	51.0	K-19150/K-19283 X
	2.8346	0.7480	3.5	1.5	49.5	60.0	K-16150/K-16283
	2.8440	0.8125	3.5	1.3	49.5	60.0	K-16150/K-16284
	2.8440	0.9375	3.5	2.3	49.5	60.0	K-16150/K-16283
	2.8750	0.9375	3.5	0.8	74.8	93.0	K-2788/K-2735 X
	3.0000	0.8125	1.5	1.3	56.1	64.0	K-28150/K-28300
	3.0000	0.9375	3.5	0.8	74.8	93.0	K-2788/K-2729
	3.0000	0.9375	3.5	3.3	74.8	93.0	K-2788/K-2720
	3.1250	1.1563	3.5	3.3	91.3	110.0	K-3490/K-3420
	3.1510	0.8438	1.5	1.5	56.1	64.0	K-28150/K-28317
	3.2500	1.1563	0.8	3.3	85.8	118.0	K-HM 801346/K-HM 801310
1.5625	3.2500	1.1563	2.3	3.3	85.8	118.0	K-HM 801346 X/K-HM 801310
	3.4843	1.0625	3.5	1.5	101.0	114.0	K-418/K-414
	2.8750	0.9375	3.5	0.8	74.8	93.0	K-2789/K-2735 X
	2.8750	1.0096	0.8	2.3	66.0	86.5	K-M 201047/K-M 201011
	3.0000	0.9375	3.5	0.8	74.8	93.0	K-2789/K-2729
	3.0000	0.9375	3.5	3.3	74.8	93.0	K-2789/K-2720
	1.6137	2.7549	0.6890	3.6	1.5	44.0	58.5
1.6250	2.8750	0.6562	3.5	1.5	46.8	56.0	K-18590/K-18520
	2.8910	0.7700	3.5	0.8	55.0	69.5	K-LM 501349/K-LM 501310
	2.8910	0.8437	3.5	0.8	55.0	69.5	K-LM 501349/K-LM 501314
	2.8910	0.9060	3.5	2.3	55.0	69.5	K-LM 501349/K-LM 501311
	3.0000	0.7090	1.5	1.5	45.7	56.0	K-11162/K-11300
	3.0000	0.8750	3.5	0.8	68.2	86.5	K-24780/K-24720
	3.2500	1.0450	3.5	3.3	73.7	91.5	K-M 802048/K-M 802011
	3.4375	1.1875	1.5	3.3	102.0	132.0	K-3585/K-3525
	3.4375	1.1875	3.5	3.3	102.0	132.0	K-3577/K-3525
	3.4843	1.0625	3.5	1.5	101.0	114.0	K-419/K-414
	3.5000	1.1875	35.0	3.3	95.2	127.0	K-HM 803146/K-HM 803110
	3.7500	1.2188	1.5	0.8	88.0	96.5	K-53162/K-53375
	3.7500	1.2188	1.5	2.3	88.0	96.5	K-53162/K-53370
	3.8750	1.2188	1.5	1.5	88.0	96.5	K-53162/K-53387 X
1.6875	4.0000	1.3750	3.5	3.3	151.0	190.0	K-526/K-522
1.6880	3.4375	1.1875	3.5	3.3	102.0	132.0	K-3579/K-3525
	3.2650	0.9375	3.5	0.8	80.9	106.0	K-25577/K-25520
	3.2650	1.0625	3.5	2.3	80.9	106.0	K-25577/K-25523
1.7500	3.2700	0.9400	3.5	2.0	80.9	106.0	K-25577/K-25522
	2.8750	0.7188	1.5	1.5	48.4	67.0	K-L 102849/K-L 102810

Dimensions				Load Rating			AEC Bearing
inch				kN			
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	3.2650	0.9375	3.5	0.8	80.9	106.0	K-25580/K-25520
	3.2650	1.0586	3.5	2.3	80.9	106.0	K-25580/K-25523
	3.2700	0.9400	3.5	2.0	80.9	106.0	K-25580/K-25522
	3.4375	1.1875	3.5	3.3	102.0	132.0	K-3578/K-3525
	3.5000	1.1875	3.5	3.3	95.2	127.0	K-HM 803149/K-HM 803110
	3.5480	0.9055	3.5	2.3	70.4	81.5	K-355 X/K-352
	3.6250	1.1875	3.5	3.3	95.2	127.0	LM 803149/LM 803112
	3.6718	1.1875	3.5	3.3	110.0	146.0	K-3782/K-3720
<b>1.7500</b>	3.7500	1.0938	3.5	2.3	105.0	125.0	K-438/K-432
	3.7500	1.0938	0.8	0.8	105.0	137.0	K-33885/K-33822
	3.7500	1.2188	1.3	0.8	88.0	96.5	K-53176/K-53375
	3.7500	1.2188	1.3	2.3	88.0	96.5	K-53176/K-53377
	3.7500	1.2188	2.0	0.8	88.0	96.5	K-53178/K-53375
	3.7500	1.2188	2.0	2.3	88.0	96.5	K-53178/K-53377
	3.7500	1.2188	3.5	0.8	88.0	96.5	K-53177/K-53375
	3.7500	1.2188	3.5	0.8	101.0	122.0	K-HM 903249/K-HM 903210
	3.8750	1.2188	1.3	1.5	88.0	96.5	K-53176/K-53387 X
	4.0000	1.3750	3.5	3.3	151.0	190.0	K-527/K-522
	4.2500	1.4375	3.5	3.3	151.0	190.0	K-535/K-532 X
	4.3750	1.5000	3.5	3.3	151.0	190.0	K-535/K-532 A
	4.7500	1.6250	3.5	3.3	168.0	212.0	K-615/K-612
<b>1.7710</b>	3.6718	1.1875	3.5	3.3	110.0	146.0	K-3776/K-3720
<b>1.7712</b>	3.3465	0.8125	2.0	1.5	70.4	81.5	K-358 X/K-354 X
	4.1333	0.9257	2.5	2.5	110.0	146.0	K-HM 905843/K-HM 905810
<b>1.7812</b>	3.0625	0.7812	3.5	0.8	53.9	69.5	K-LM 603049/K-LM 603011
<b>1.7960</b>	3.2650	0.9375	3.5	0.8	80.9	106.0	K-25590/K-25520
	3.2650	1.0625	3.5	2.3	80.9	106.0	K-25590/K-25523
	3.2700	0.9400	3.5	2.0	80.9	106.0	K-25590/K-25522
<b>1.8105</b>	2.9518	0.7087	2.3	1.5	50.1	71.0	K-LM 503349/K-LM 503310
	3.5817	1.2598	3.5	3.5	121.0	156.0	K-HM 204049/K-HM 204010
<b>1.8125</b>	3.1250	0.6875	2.8	1.5	49.5	62.0	K-18690/K-18620
	3.3465	0.8125	2.3	1.5	70.4	81.5	K-359 S/K-354 X
<b>1.8750</b>	3.8125	0.8268	0.8	0.8	80.9	102.0	K-386 A/K-382 A
	4.0000	1.3750	3.5	3.3	151.0	190.0	K-528/K-522
<b>1.8750</b>	4.0000	1.3750	8.0	3.3	151.0	190.0	K-528 R/K-522
	4.3750	1.1875	3.5	3.3	95.2	114.0	K-55187/K-55437
	4.4375	1.1875	3.5	3.3	95.2	114.0	K-55187/K-55443
<b>1.9375</b>	4.0625	0.9314	3.5	3.3	176.0	240.0	K-5395/K-5335
	4.1250	1.4375	3.5	3.3	145.0	204.0	K-HM 807044/K-HM 807010
<b>1.9685</b>	3.6718	1.1875	3.5	3.3	110.0	146.0	50KW01/3720
<b>2.0000</b>	3.3465	0.6875	3.5	1.5	50.1	65.5	K-18790/K-18720
	3.5000	0.8125	3.5	1.3	76.5	91.5	K-368 A/K-362 A
	3.5433	0.9843	3.5	2.0	76.5	91.5	K-368 A/K-362 X
	3.6250	0.9688	3.5	0.8	85.8	118.0	K-28580/K-28521
	3.6718	1.1875	3.5	3.3	110.0	146.0	K-3780/K-3720
	3.7500	1.0938	3.5	0.8	105.0	137.0	K-33889/K-33822
	3.8437	0.9688	3.5	0.8	89.7	129.0	K-28678/K-28622
	4.0000	1.3750	3.5	3.3	151.0	190.0	K-529 X/K-522

Dimensions				Load Rating			AEC Bearing
inch				kN			
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	4.1250	1.1688	3.5	3.3	157.0	224.0	K-4580/K-4535
	4.1250	1.1875	6.4	3.3	130.0	173.0	K-45284/K-45220
	4.1250	1.4375	3.5	3.3	145.0	204.0	K-HM807046/K-HM 807010
	4.2500	1.4375	3.5	3.3	151.0	190.0	K-537/K-532 X
	4.3750	1.1875	3.5	3.3	105.0	140.0	K-HM907643/K-HM 907614
	4.3750	1.1875	3.5	3.3	95.2	114.0	K-55200/K-55437
	4.3750	1.5000	3.5	3.3	151.0	190.0	K-537/K-532 A
	4.4375	1.1875	3.5	3.3	95.2	114.0	K-55200/K-55443
	4.6250	1.3125	3.5	3.3	128.0	150.0	K-66200/K-66462
<b>2.0625</b>	3.6250	0.9688	0.8	3.5	85.8	118.0	28584/28521
<b>2.1250</b>	3.5000	0.7500	2.3	2.0	583.0	78.0	K-LM 806649/K-LM 806610
	3.7500	1.0938	1.5	0.8	105.0	137.0	K-33895/K-33822
	4.1250	1.4375	3.5	3.3	145.0	204.0	K-HM 807049/K-HM 807010
<b>2.1250</b>	4.2500	1.4375	3.5	3.3	151.0	190.0	K-539/K-532 X
	4.3750	1.5000	3.5	3.3	151.0	190.0	K-539/K-532 A
	4.7500	1.6250	3.5	3.3	168.0	212.0	K-621/K-612
	4.8750	1.4375	3.3	3.5	157.6	291.0	CK 72212/2/SK 72487/3
	5.0000	1.7500	3.5	3.3	209.0	275.0	K-65212/K-65500
<b>2.1875</b>	3.8437	0.9688	3.5	3.5	89.7	129.0	K-28680/K-28622
	4.8125	1.7188	1.3	1.3	201.0	305.0	K-5566/K-5535
<b>2.2500</b>	3.8125	0.8268	2.3	0.8	80.9	102.0	K-387/K-382 A
	3.8125	0.8268	3.5	0.8	80.9	102.0	K-387 A/K-382 A
	3.8125	0.8268	5.0	0.8	80.9	102.0	K-387 AS/K-382 A
	3.8125	1.0000	2.3	2.3	80.9	102.0	K-387/K-382 S
	3.8125	1.0000	3.5	2.3	80.9	102.0	K-387 A/K-382 S
	3.8125	1.0000	5.0	2.3	80.9	102.0	K-387 AS/K-382 S
	3.8437	0.9688	3.5	0.8	89.7	129.0	K-28682/K-28622
	3.8750	0.8268	2.3	0.8	80.9	102.0	K-387/K-382
	3.8750	0.8268	3.5	0.8	80.9	102.0	K-387 A/K-382
	3.8750	0.8268	5.0	0.8	80.9	102.0	K-387 AS/K-382
	3.9370	0.8268	2.3	2.0	80.9	102.0	K-387/K-383 A
	3.9370	0.8268	3.5	2.0	80.9	102.0	K-387 A/K-383 A
	3.9370	0.8268	5.0	2.0	80.9	102.0	K-387 AS/K-383 A
	4.1250	1.1875	2.3	3.3	121.0	160.0	K-462/K-453 X
	4.2500	1.0938	2.3	2.3	121.0	160.0	K-462/K-453 AS
	4.4375	1.1875	8.0	3.3	142.0	204.0	K-39581/K-39520
	4.4375	1.1875	3.5	3.3	142.0	204.0	K-39580/K-39520
	4.7238	1.2894	3.5	0.8	142.0	204.0	K-39580/K-39528
	4.7500	1.6250	3.5	3.3	212.0	186.0	K-623/K-612
	5.0000	1.7500	3.5	3.3	209.0	275.0	K-65225/K-65500
<b>2.2650</b>	3.8125	0.8268	3.5	0.8	80.9	102.0	K-388 A/K-382 A
	3.8125	1.0000	3.5	2.3	80.9	102.0	K-388 A/K-382 S
	3.8750	0.8268	3.5	0.8	80.9	102.0	K-388 A/K-382
	3.9370	0.8268	3.5	2.0	80.9	102.0	K-388 A/K-383 A
<b>2.3750</b>	3.9370	1.0000	3.5	3.3	85.8	125.0	K-28985/K-28921
	4.0000	1.0000	3.5	3.3	85.8	125.0	K-28985/K-28920
	5.0000	1.4375	3.5	1.5	165.0	236.0	K-HM 813841/K-HM 813811
	5.0000	1.7500	3.5	3.3	209.0	275.0	K-65237/K-65500

Dimensions				Load Rating			AEC Bearing	
inch				kN				
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )		
2.4375	5.1250	1.4375	5.0	3.3	151.0	180.0	K-HM 9112245/K-HM 911241n	
	5.3750	1.8125	3.5	3.3	229.0	375.0	K-H 715334/K-H 715311	
	5.7500	1.6250	3.5	3.3	198.0	236.0	K-H 913842/K-H 913810	
2.5000	5.7500	1.6250	7.0	3.3	198.0	236.0	K-H 913843/K-H 913810	
	4.1250	0.8438	2.0	2.0	85.8	112.0	K-39250/K39412	
	4.2500	1.0000	3.5	3.3	89.7	137.0	K-29585/K-29520	
2.5625	4.3307	0.8661	3.5	1.3	88.0	118.0	K-395/K-394 A	
	4.4375	1.1875	3.5	3.3	142.0	204.0	K-39585/K-39520	
	4.4375	1.1875	3.5	3.3	123.0	183.0	K-3982/K-3920	
	4.8750	1.5000	3.5	3.3	173.0	240.0	K-559/K-552 A	
	5.1181	1.4646	3.0	3.6	194.3	370.0	565XL/562SL	
	5.3447	2.1250	3.5	3.3	286.0	400.0	K-6379/K-6320	
	2.5979	4.8809	1.6339	7.0	3.5	224.0	310.0	K-H 212749/K-H 212710
	2.6250	4.3307	0.8661	0.8	1.3	88.0	118.0	K-395 A/K-394 A
	4.3307	0.8661	3.5	1.3	88.0	118.0	K-395 S/K-394 A	
	4.3307	1.0000	3.5	1.3	89.7	137.0	K-29590/K-29521	
2.6250	4.4375	1.1875	3.5	3.3	123.0	183.0	K-3984/K-3920	
	4.4375	1.1875	3.5	0.8	123.0	183.0	K-3984/K-3925	
	4.4375	1.1875	3.5	3.3	142.0	204.0	K-39590/K-39520	
	4.6250	1.1875	3.5	3.3	123.0	190.0	K-33262/K-33462	
	4.7244	1.1730	3.5	0.8	123.0	190.0	K-33262/K-33472	
	4.8750	1.5000	3.5	3.3	172.0	240.0	K-560/K-552 A	
	5.3447	2.1250	4.3	3.3	286.0	400.0	K-6386/K-6320	
	5.3750	1.6250	3.5	3.3	194.0	260.0	K-641/K-632	
	2.6875	4.3307	0.8661	2.3	1.3	88.0	118.0	K-399 A/K-394 A
	5.3750	1.8125	3.5	3.3	229.0	375.0	K-H 715343/K-H 715311	
2.7500	6.3750	1.9375	3.5	3.3	260.0	335.0	K-9278/K-9220	
	3.9062	0.6693	1.5	1.5	46.8	76.5	K-LL 713149/K-LL 713110	
	4.4375	1.0000	1.5	3.3	99.0	156.0	K-29675/K-29620	
	4.6250	1.1875	3.5	3.3	123.0	190.0	K-33275/K-33462	
	4.7244	1.1730	3.5	0.8	123.0	190.0	K-33275/K-33472	
	4.7244	1.1730	3.5	2.0	132.0	186.0	K-482/K-472	
	4.7244	1.2813	3.5	3.3	154.0	228.0	K-47487/K-47420	
	4.8750	1.1875	3.5	3.3	132.0	186.0	K-482/K-472 X	
	5.0000	1.4375	3.5	3.3	176.0	255.0	K-566/K-563	
	2.7559	4.7244	1.1730	2.0	2.0	132.0	186.0	K-484/K-472
2.8125	4.6250	1.1875	3.5	3.3	123.0	190.0	K-33281/K-33462	
	4.7244	1.1730	3.5	0.8	123.0	190.0	K-33281/K-33472	
	4.7244	1.2813	3.5	3.3	154.0	228.0	K-47490/K-47420	
	5.0000	1.4375	3.5	1.5	165.0	236.0	K-HM 813849/K-813811	
	5.3750	1.6250	6.4	3.3	194.0	260.0	K-645/K-632	
	5.3750	1.6250	3.5	3.3	224.0	290.0	K-H 414249/K-H 414210	
	5.3750	1.8125	3.5	3.3	229.0	375.0	K-H 715345/K-H 715311	
	2.8750	4.4375	1.0000	3.5	3.3	99.0	156.0	K-29685/K-29620
	4.6250	1.1875	3.5	3.3	123.0	190.0	K-33287/K-33462	
	4.7244	1.1730	3.5	0.8	123.0	190.0	K-33287/K-33472	
5.0000	1.4375	3.5	3.3	176.0	255.0	K-567/K-563		
5.0000	1.4375	4.8	3.3	176.0	255.0	K-567 X/K-563		

Dimensions				Load Rating			AEC Bearing
inch				kN			
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
<b>3.0000</b>	4.3125	0.7500	1.5	1.5	58.3	102.0	<b>K-L 814749/K-L 814710</b>
	5.0000	1.1875	3.5	3.3	138.0	204.0	<b>K-42687/K-42620</b>
	5.0000	1.1875	6.4	3.3	138.0	204.0	<b>K-42688/K-42620</b>
	5.2500	1.1875	6.4	3.3	145.0	220.0	<b>K-495 AX/K-492 A</b>
	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-495 A/K-492 A</b>
	5.2500	1.3125	6.4	3.3	165.0	260.0	<b>K-47678/K-47620</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-495 A/K-493</b>
	5.3750	1.1875	6.4	3.3	145.0	220.0	<b>K-495 AX/K-493</b>
	5.5000	1.4375	3.5	3.3	187.0	280.0	<b>K-575/K-572 X</b>
	5.5115	1.4375	3.5	3.3	187.0	280.0	<b>K-575/K-572</b>
	5.7500	1.6250	3.5	3.3	220.0	320.0	<b>K-659/K-653</b>
	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-748 S/K-742</b>
	6.0000	1.6250	3.5	3.3	220.0	320.0	<b>K-659/K-652</b>
	6.3750	1.9375	3.5	3.3	260.0	335.0	<b>K-9285/K-9220</b>
	<b>3.0625</b>	4.6250	1.0000	3.5	3.3	101.0	163.0
<b>3.1875</b>	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-496/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-496/K-493</b>
<b>3.2500</b>	4.9375	1.0000	3.5	1.5	112.0	186.0	<b>K-27687/K-27620</b>
	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-495/K-492 A</b>
	5.2500	1.3125	3.5	3.3	165.0	260.0	<b>K-47686/K-47620</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-495/K-493</b>
	5.5000	1.4375	3.5	3.3	187.0	280.0	<b>C-580/K-572 X</b>
	5.5115	1.4375	3.5	3.3	187.0	280.0	<b>K-580/K-572</b>
	5.5115	1.4375	6.8	3.3	187.0	280.0	<b>K-582/K-572</b>
	5.7500	1.6250	3.5	3.3	220.0	320.0	<b>K-663/K-653</b>
	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-749 A/K-742</b>
	6.0000	1.6250	3.5	3.3	220.0	320.0	<b>K-663/K-652</b>
<b>3.2813</b>	4.9375	1.0000	3.5	1.5	112.0	186.0	<b>K-27690/K-27620</b>
<b>3.3125</b>	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-498/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-498/K-493</b>
<b>3.3475</b>	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-749/K-742</b>
<b>3.3750</b>	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-497/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-497/K-493</b>