


# Taper Roller Bearings

Thrust  
Inch Series

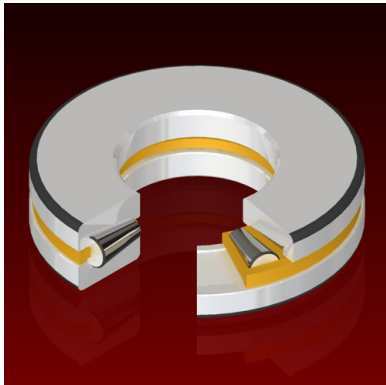

Dimensions				Load Rating		AEC Bearing
mm				kN		
d	D	B	r	Dynamic (C)	Static (C <sub>0</sub> )	
<b>76.200</b>	161.925	33.338				<b>T 311</b>
<b>111.760</b>	223.520	55.880	3.3	91.2	87.9	<b>T 441</b>
<b>127.000</b>	266.700	58.738	4.8	86.7	83.6	<b>T 511</b>
<b>128.588</b>	266.700	58.738	4.8	100.0	107.0	<b>T 511 A</b>
<b>127.000</b>	250.825	55.562	4.8	122.0	121.0	<b>T 520</b>
<b>152.400</b>	317.500	69.850	4.8	141.0	148.0	<b>T 611</b>
<b>165.100</b>	311.150	88.900	6.4	185.0	199.0	<b>T 651</b>
<b>168.275</b>	304.800	69.850	6.4	193.0	212.0	<b>T 661</b>
<b>174.625</b>	358.775	82.550	6.4	224.0	246.0	<b>T 691</b>
<b>177.800</b>	368.300	82.550	8.0	294.0	336.0	<b>T 711</b>
<b>203.200</b>	419.100	92.075	8.0	380.0	440.0	<b>T 811</b>
<b>228.600</b>	431.800	88.773	9.7	457.0	1124.1	<b>T 9020</b>
<b>228.600</b>	482.600	104.775	11.2	391.0	462.0	<b>T 911</b>
<b>234.950</b>	482.600	104.775	11.2	391.0	462.0	<b>T 911 A</b>
<b>234.950</b>	546.100	127.000	16.0	455.0	546.0	<b>T 921</b>
<b>190.500</b>	368.300	92.250	8.7	429.0	517.0	<b>T 9727</b>
<b>206.375</b>	419.100	120.650	11.4	591.0	744.0	<b>T 9848</b>
<b>241.300</b>	496.300	127.000	16.0	475.0	599.0	<b>T 9936</b>
<b>260.000</b>	360.000	92.000	1.0	650.0	841.0	<b>350981 C<sup>1</sup></b>
<b>273.050</b>	552.450	132.715	6.4	4372.0	20777.0	<b>N 3243 A</b>
<b>350.000</b>	490.000	130.000	1.1	990.0	4650.0	<b>351100 C<sup>1</sup></b>

<sup>1</sup> Double Direction Thrust Bearing